


<u>D.S.T.</u>	<u>HOR. (E/W)</u>	<u>VERT. (N/S)</u>	<u>DISTANCE</u>
6	+2.11	-0.47	2.16
7	+2.24	-0.12	2.24
8	+2.22	+0.23	2.23
9	+2.04	+0.57	2.12
10	+1.73	+0.87	1.93
11	+1.29	+1.11	1.70
12	+0.77	+1.27	1.49
1	+0.20	+1.35	1.36
2	-0.39	+1.33	1.39
3	-0.95	+1.23	1.55
4	-1.44	+1.04	1.78
5	-1.84	+0.78	2.00
6	-2.11	+0.47	2.16
7	-2.24	+0.12	2.24
8	-2.22	-0.23	2.23
9	-2.04	-0.57	2.12

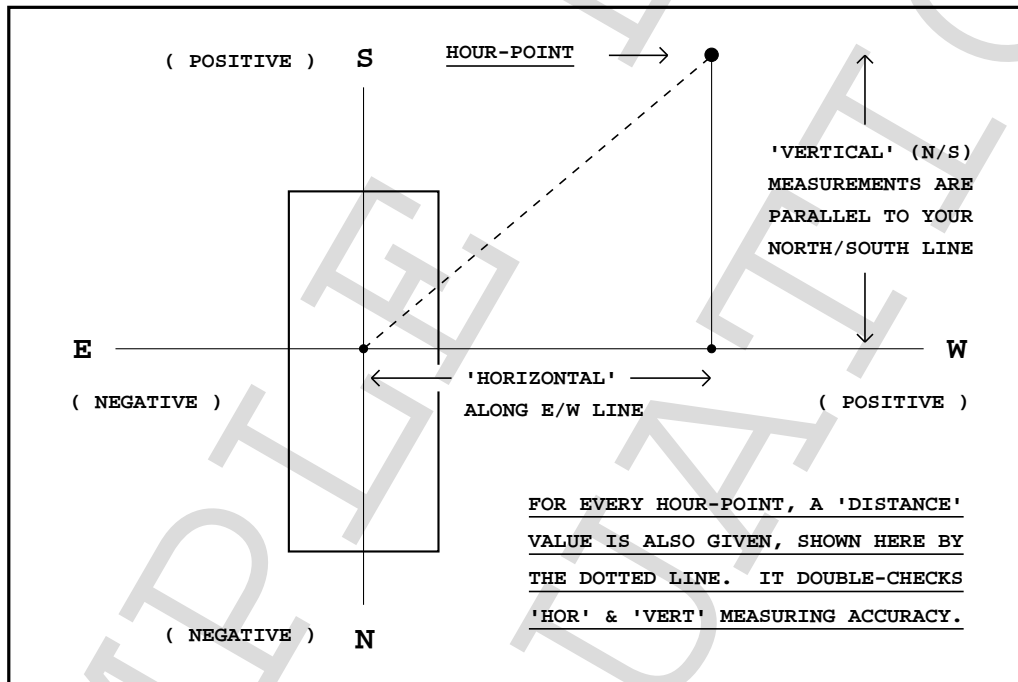

<u>STANDARD</u>	<u>HOR. (E/W)</u>	<u>VERT. (N/S)</u>	<u>DISTANCE</u>
7	+2.96	+0.31	2.97
8	+2.72	+0.76	2.83
9	+2.30	+1.16	2.58
10	+1.73	+1.48	2.27
11	+1.03	+1.70	1.99
12	+0.27	+1.80	1.82
1	-0.52	+1.78	1.85
2	-1.26	+1.64	2.07
3	-1.92	+1.39	2.37
4	-2.45	+1.04	2.66
5	-2.82	+0.62	2.88
6	-2.99	+0.16	2.99

THE SUNCLOCK IS NOW COMPLETE, AND YOUR LAYOUT SHOULD LOOK LIKE THE DIAGRAMS AS SHOWN ON THE FOLLOWING TWO PAGES. **CONSTRUCTION MATERIALS** ARE FOR YOU TO DECIDE. IT CAN SIMPLY BE PAINTED ON TO ANY SUITABLE SURFACE, OR FOR A MORE PERMANENT ARRANGEMENT, YOU COULD USE CONCRETE WITH SOME CONTRASTING PEBBLES SET INTO IT, IN ORDER TO PROVIDE THE VARIOUS HOUR AND DATE MARKINGS NEEDED. WE WOULD SUGGEST THAT THE NUMERALS FOR HOUR-MARKERS SHOULD BE APPROXIMATELY 15 CENTIMETRES IN SIZE, WITH DATE-SCALE LETTERING BEING ONLY 3 CENTIMETRES. (IF NUMERALS OR LETTERING ARE MADE LARGER THAN THIS, THEY MIGHT 'OVERLAP').